

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

PATENT APPLICATION TRANSMITTAL LETTER

Att'y Dkt no.: 10694/6

Assistant Commissioner for Patents
Washington D.C. 20231

Transmitted herewith for filing is the patent application of:

Inventors: CHUCK FERGUSON
THOMAS GORSUCH

For: **SYSTEM AND METHOD FOR ALWAYS ON VIRTUAL CONNECTIVITY IN
A WIRELESS SYSTEM**

Enclosed are:

1. 13 sheets of specification, 6 sheets of claims, 1 sheet of abstract; and 4 sheets of drawings.


The filing fee has been calculated as shown below:

	NUMBER FILED	NUMBER EXTRA*	RATE (\$)	FEE (\$)
BASIC FEE			760.00	760.00
TOTAL CLAIMS	35 - 20 =	15	18.00	270.00
INDEPENDENT CLAIMS	6 - 3 =	3	78.00	234.00
MULTIPLE DEPENDENT CLAIMS PRESENT				0.00
FEE FOR RECORDATION OF ASSIGNMENT			40.00	0.00
*Number extra must be zero or larger			TOTAL	\$1,264.00

If applicant is a small entity under 37 CFR §§ 1.9 and 1.27, then divide total fee by 2, and enter amount here

2. The Office is authorized to charge the filing fee of **\$1,264.00** to Deposit Account No. **11-0600**.
3. Please direct all correspondence to Stuart D. Smolen, Kenyon & Kenyon, 1500 K Street, N.W., Suite 700, Washington, D.C. 20005, Telephone Number (202) 220-4200.

Dated: April 8, 1999


Stuart D. Smolen (Reg. No. 42,161)

KENYON & KENYON
1025 Connecticut Avenue, NW, Suite 600
Washington, DC 20036
Phone: (202) 220-4200
Fax: (202) 220-4201

**SYSTEM AND METHOD FOR ALWAYS ON VIRTUAL CONNECTIVITY IN A
WIRELESS SYSTEM**

The present invention relates to a wireless communication system. In particular, the present invention relates to systems and methods for providing wireless connections between a wireless access device and a network.

BACKGROUND

Wireless access for computing networks is known in the art. Typically such systems are implemented by a layered wireless communication system. Layered communication systems are characterized by levels of processing that are performed for transmission and reception of a data signal. For example, a “physical layer” typically refers to processing that is performed to package a signal for radio transmission; it may include error coding, data interleaving digital code modulation, and other conventional processing. The physical layer can be contrasted with, for example, a “data layer” that performs processing to format a signal into a format appropriate for delivery for the wireless device to the subscriber terminal.

Prior-art systems are disadvantageous because the wireless access device maintains a channel on a physical layer when the subscriber terminal needs to maintain an active channel, even if there is no payload data being transferred over the physical channel. This system is bandwidth inefficient because data transmissions in computer networks are “bursty,” characterized by a short transfer of high-rate data, followed by a relatively long period in

which no data are transferred. This inefficiency reduces the number of subscribers that can be working on a system.

Thus a need exists for a system in which a subscriber and a wireless-access device can communicate along a layer of the connection, without activating the physical layer until payload data is intended to be sent.

SUMMARY OF THE INVENTION

To alleviate the problems inherent in the prior art, systems and methods are introduced to provide wireless communication to a network.

In one embodiment of the present invention, a wireless access device determines whether payload data has been received from a subscriber's terminal. If so, a first set of traffic channels is requested, and the payload data is transmitted via the first set of traffic channels. A release message can then be sent, thereby freeing the traffic channels from use.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a system overview of an embodiment of the present invention including a wireless access device and a base station.

Figure 2 is a flowchart depicting an embodiment of a method of practicing the present invention from the perspective of a wireless access device.

Figure 3 is a flowchart depicting a method of practicing an another embodiment of the present invention.

Figure 4 is a block diagram of an apparatus according to an embodiment of the present invention, comprising a processor and a memory.

DETAILED DESCRIPTION

The present invention relates to a wireless communication system. In particular, the present invention relates to network communication in a wireless environment in which an idle mode is maintained until data is ready for transmission, and then an active mode is entered for transmission.

Figure 1 is a block diagram illustrating a network-communication system constructed in accordance with an embodiment of the present invention. The communication system 100 can include network 101, base station 102, wireless access device 103, and subscriber terminal 104. Wireless access device 103 is typically a wireless, non-roaming device, although the present invention is not limited to non-roaming devices.

Wireless access device 103 can receive payload data from subscriber terminal 104, and transmit both payload and other types of data over communication system 100. Wireless access device can communicate with network 101 through a wireless connection with base station 102. Wireless access device 103 can contain a buffer, or any kind of practicable storage device, to store data received from subscriber terminal 105, and can contain a processor that is capable of determining whether data is present in the buffer, and how much data is in the buffer. The processor can also transmit a request for traffic channels to carry payload data.

Base station 102 can send and receive data to and from both wireless access device 103 and network 101. Base station 102 can receive and process requests for channel assignment, and can assign traffic channels for payload data transmission between base station 102 and wireless access device 103. Base station 102 can also send and receive a release message, thereby deconstructing the assigned traffic channels after the data is sent or received, respectively.

In one embodiment of the present invention, there are at least two distinct network-communication modes. Note that in this context, a mode refers to one direction only, independent of another mode. For example, a device can be idle in the forward direction, but active in the reverse direction.

First is an idle mode, in which no payload data is sent, even though wireless access device 103 has registered with base station 102. In this idle mode, no data is sent. When there is data to be sent, the idle mode becomes an active mode in which traffic channels are assigned, data is transmitted over the traffic channels, and then the traffic channels are released. The network connection has now returned to idle mode. If there is more data to be sent from wireless access device to base station, or from base station to wireless access device, then an active mode is entered in which traffic channels are again assigned and payload data is again transmitted. Once this data is transmitted, the traffic channels are released, and the system again enters an idle mode. Thus, traffic channels are not assigned until some amount of data is present. In one

embodiment of the present invention, channels are allocated on a per-subscriber basis. Thus, once traffic channels are requested, all of the allocated traffic channels can be assigned to carry transmitted data. Once this data is transmitted, the traffic channels are released and network awaits the next active mode.

5 In an embodiment of the present invention, the modes are defined in one direction only. For example, a wireless-access device can be in idle mode for sending information, but can be receiving information at the same time.

In another embodiment of the present invention, a third mode is employed. Specifically, a heartbeat mode is employed such that low-bandwidth timing signals are transmitted over a reverse control or non-traffic channel until payload data is present for transmission. If payload data is present for transmission, then the system enters an active mode as in the previous embodiment. That is, traffic channels are assigned, the payload data is transmitted over the traffic channels, and then the traffic channels are released.

10 Figure 2 is a flow chart of an overview of at least one embodiment of the present invention. In this embodiment, wireless access device 103 has received data from a subscriber terminal, and desires to transmit that data to a network such as the Internet through base station 102. At step 201, wireless access device 103 requests a number of traffic channels from base station 102. This request can be made over a reverse control or non-traffic channel.

15 At step 202, base station 102 grants the traffic channel request. This can be done by sending wireless access device 103 an explicit message over a forward control or non-traffic channel, thereby creating or constructing the traffic channels. Alternatively, although not shown, base station 102 can simply create or construct the traffic channels based on the request without sending an explicit grant.

20 Once the traffic channels are constructed, wireless access device 103 can transmit payload data to the base station at step 203, the payload data ultimately intended for a network. Once the payload data is sent, then at step 204, wireless access device 103 can send a release, prompting the base station to release the traffic channels. The system is now in idle mode.

25 If base station 102 has data to transmit to wireless access device 103, for example, a web page in response to a URL received from the wireless access device, then in one embodiment of the present invention, base station 102 can send a message over a forward control or non-traffic

channel to wireless access device 103 that a number of traffic channels has been assigned at step 205. Payload data can be sent over the traffic channels at step 206, and the channels are released at step 207, placing the system back in idle mode.

In another embodiment of the present invention, step 205 does not include a message to wireless access device 104 that a number of traffic channels has been assigned. Rather, in this step, traffic channels are simply assigned, and then payload data is transmitted over the assigned channels at step 206.

As discussed above, the system can include a heartbeat mode in which low-bandwidth timing data is transmitted over an control or non-traffic channel. This heartbeat mode can take the place of the idle mode.

Figure 3 is a flow chart depicting a method of practicing an embodiment of the present invention. At step 301, the system is in idle mode. Although not shown, the system can instead be in a heartbeat mode. At step 302, it is determined whether payload data is present. If payload data is present, then at step 303, a number of traffic channels are requested from a base station. Once the traffic channels are assigned, the payload data is transmitted over the requested channels at step 304. The channels are then released, and the system returns to idle mode. In one embodiment of the present invention, a release message can be sent after the payload data is transmitted.

The constructed traffic channels can be one or many radio frequency channels, and the payload-data transmission can be code division multiple access (CDMA) transmission

Note that the flow charts in the present document are numbered, and the claim steps are numbered or lettered, solely for the reader's convenience. The embodiment and the claims are not intended to imply an order to the steps; the steps can be performed in any order practicable.

Figure 4 is a block diagram of an apparatus according to an embodiment of the present invention. Figure 4 includes processor 401 and memory 402, with memory 402 storing instructions adapted to be executed on processor 401 to run any method embodiment of the present invention. For example, memory 402 can store instructions adapted to be executed on processor 401 to determine whether payload data is present, determine the size of the payload

data, request a number of traffic channels, and then transmit the payload data over the traffic channels.

For the purposes of this application, memory includes any medium capable of storing instructions adapted to be executed by a processor. Some examples of such media include, but are not limited to, RAM, ROM, floppy disks, CDROM, magnetic tape, hard drives, optical storage units, and any other device that can store digital information. In one embodiment, the instructions are stored on the medium in a compressed and/or encrypted format. As used herein, the phrase “adapted to be executed by a processor” is meant to encompass instructions stored in a compressed and/or encrypted format, as well as instructions that have to be compiled or installed by an installer before being executed by the processor.

The present invention has been described in terms of several embodiments solely for the purpose of illustration. Persons skilled in the art will recognize from this description that the invention is not limited to the embodiments described, but may be practiced with modifications and alterations limited only by the spirit and scope of the appended claims.

WHAT IS CLAIMED IS

- 1 1. A method for accessing data from a network via a wireless communication link, the
2 method comprising the steps of:
3 (a) determining whether payload data has been received from a subscriber's terminal;
4 (b) requesting, based on said determining, a first set of traffic channels, the first set
5 of traffic channels including at least one traffic channel; and
6 (c) transmitting the data over the requested first set of traffic channels.
- 1 2. The method of claim 1, wherein the transmitted data is transmitted via Code Division
2 Multiple Access (CDMA) modulated radio signals.
- 1 3. The method of claim 1, further comprising:
2 (d) transmitting a release of the first set of traffic channels after the data is
3 transmitted.
- 1 4. The method of claim 3, further comprising:
2 (e) receiving an assignment of a second set of traffic channels, the second set of
3 traffic channels including at least one traffic channel; and
4 (f) receiving data over the second set of traffic channels.
- 1 5. The method of claim 3, wherein said requesting is performed over a reverse control or
2 non-traffic channel.
- 1 6. A method for accessing data of a computer network via a wireless communication link,
2 the method comprising the steps of:
3 (a) constructing a first set of traffic channels, the set of traffic channels containing
4 at least one traffic channel;
5 (b) receiving, via the constructed first set of traffic channels, a request for a network
6 address; and
7 (c) receiving a release of the first set of traffic channels.

- 1 7. The method of claim 6, wherein the request for a network address is received over a Code
2 Division Multiple Access (CDMA) modulated radio signals.

- 1 8. The method of claim 6, further comprising the steps of:
2 (d) sending an assignment of a second set of traffic channels, the second set of traffic
3 channels including at least one traffic channel; and
4 (e) sending data associated with the requested network address over the second
5 plurality of traffic channels.

- 1 9. The method of claim 8, further comprising:
2 (f) receiving a request for the first plurality of traffic channels.

- 1 10. The method of claim 8, wherein said sending an assignment of a second set of traffic
2 channels is sent via a forward control or non-traffic channel.

- 1 11. The method of claim 9, wherein the received request for the first plurality of traffic
2 channels is received via a reverse control or non-traffic channel.

- 1 12. The method of claim 9, wherein the request for a first plurality of traffic channels
2 includes information as to the size and number of channels needed.

- 1 13. An apparatus for accessing data of a computer network via a wireless communication
2 link, the apparatus comprising:
3 (a) a processor; and
4 (b) a memory coupled to said processor, said memory storing instructions adapted to
5 be executed by said processor, said instructions including:
6 (I) determining whether payload data has been received from a subscriber's
7 terminal;

- (ii) requesting, based on the determination, a first set of traffic channels, the first set of traffic channels including at least one traffic channel; and
- (iii) transmitting the data over the requested first set of traffic channels.

14. The apparatus of claim 13, wherein the transmitted data is transmitted via Code Division Multiple Access (CDMA) modulated radio signals.

15. The apparatus of claim 13, said memory storing further instructions adapted to be executed by said processor, said further instructions including:

- (iv) transmitting a release of the first set of traffic channels after the data is transmitted.

16. The apparatus of claim 15, said memory storing further instructions adapted to be executed by said processor, said further instructions including:

- (v) receiving an assignment of a second set of traffic channels, the second set of traffic channels including at least one traffic channel; and
- (vi) receiving data over the second set of traffic channels.

17. The apparatus of claim 15, wherein said requesting is performed over a reverse control or non-traffic channel.

18. An apparatus for accessing data of a computer network via a wireless communication link, the apparatus comprising:

- a a processor;
- b a memory coupled to said processor, said memory storing instructions adapted to be executed by said processor, the instructions including:
 - (I) constructing a first set of traffic channels, the set of traffic channels containing at least one traffic channel;
 - (ii) receiving, via the constructed first set of traffic channels, a request for a network address; and

10 (iii) receiving a release of the first set of traffic channels.

1 19. The apparatus of claim 18, wherein the request for a network address is received over a
2 Code Division Multiple Access (CDMA) modulated radio signals.

1 20. The apparatus of claim 18, said memory storing further instructions adapted to be
2 executed by said processor, the further instructions comprising:

3 (iv) sending an assignment of a second set of traffic channels, the second set
4 of traffic channels including at least one traffic channel; and

5 (v) sending data associated with the requested network address over the
6 second plurality of traffic channels.

1 21. The apparatus of claim 20, further comprising:

2 (vi) receiving a request for the first plurality of traffic channels.

1 22. The apparatus of claim 20, wherein said sending an assignment of a second set of traffic
2 channels is sent via a forward control or non-traffic channel.

1 23. The apparatus of claim 21, wherein the received request for the first plurality of traffic
2 channels is received via a reverse control or non-traffic channel.

1 24. The apparatus of claim 21, wherein the request for a first plurality of traffic channels
2 includes information as to the size and number of channels needed.

1 25. A medium for accessing data from a network via a wireless communication link, the
2 medium storing instructions adapted to be executed on a processor, the instructions
3 comprising:

4 (a) determining whether payload data has been received from a subscriber's terminal;

- (b) requesting, based on the determination, a first set of traffic channels, the first set of traffic channels including at least one traffic channel; and
- (c) transmitting the data over the requested first set of traffic channels.

26. The medium of claim 25, wherein the transmitted data is transmitted via Code Division Multiple Access (CDMA) modulated radio signals.

27. The medium of claim 25, said medium storing further instructions adapted to be executed on a processor, the further instructions comprising:

- (d) transmitting a release of the first set of traffic channels after the data is transmitted.

28. The medium of claim 27, said medium storing further instructions adapted to be executed on a processor, the further instructions comprising:

- (e) receiving an assignment of a second set of traffic channels the second set of traffic channels including at least one traffic channel; and
- (f) receiving data associated with the network address over the second set of traffic channels.

29. The medium of claim 27, wherein said requesting is performed over a reverse control or non-traffic channel.

30. A medium for accessing data of a computer network via a wireless communication link, the medium storing instructions adapted to be executed by a processor, the instructions comprising:

- (a) constructing a first set of traffic channels, the set of traffic channels containing at least one traffic channel;
- (b) receiving, via the constructed first set of traffic channels, a request for a network address; and
- (c) receiving a release of the first set of traffic channels.

1 31. The medium of claim 30, wherein the request for a network address is received over a
2 Code Division Multiple Access (CDMA) modulated radio signals.

1 32 The medium of claim 30, said medium storing further instructions adapted to be executed
2 on a processor, the further instructions including:

- 3 (d) sending an assignment of a second set of traffic channels, the second set of traffic
4 channels including at least one traffic channel; and
5 (e) sending data associated with the requested network address over the second
6 plurality of traffic channels.

1 33. The medium of claim 32, said medium storing further instructions adapted to be executed
2 on a processor, the further instructions including:

- 3 (f) receiving a request for the first plurality of traffic channels.

1 34. The medium of claim 32, wherein said sending an assignment of a second set of traffic
2 channels is sent via a forward control or non-traffic channel.

1 35. The medium of claim 34, wherein the received request for the first plurality of traffic
2 channels is received via a reverse control or non-traffic channel.

ABSTRACT

Data is accessed from a network via a wireless communication link. A determination is made as to whether payload data has been received from a subscriber's terminal. If so, then a request is sent for a first set of traffic channels, and the payload data is transmitted over the first set of traffic channels.

5

6583440 6233200

COMMUNICATION SYSTEM 100

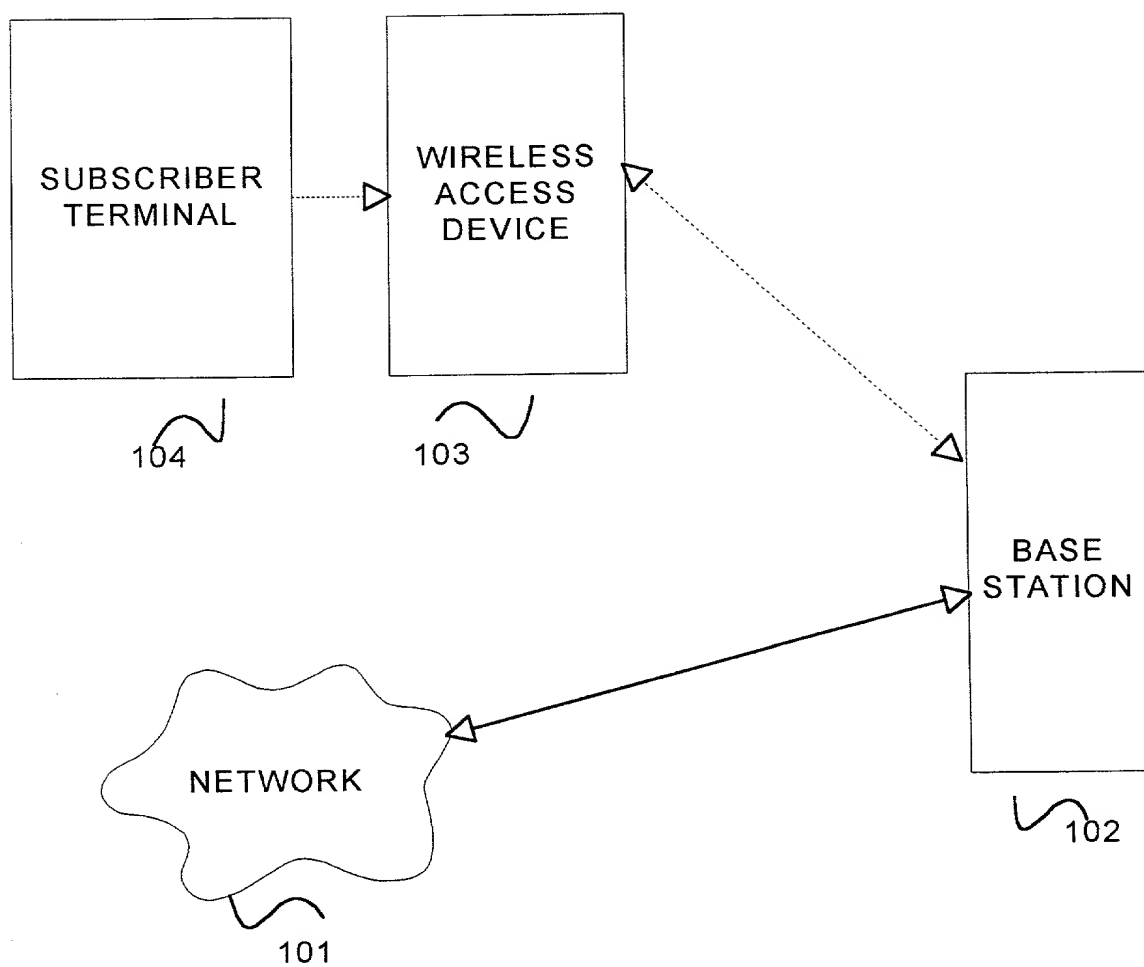


FIGURE 1

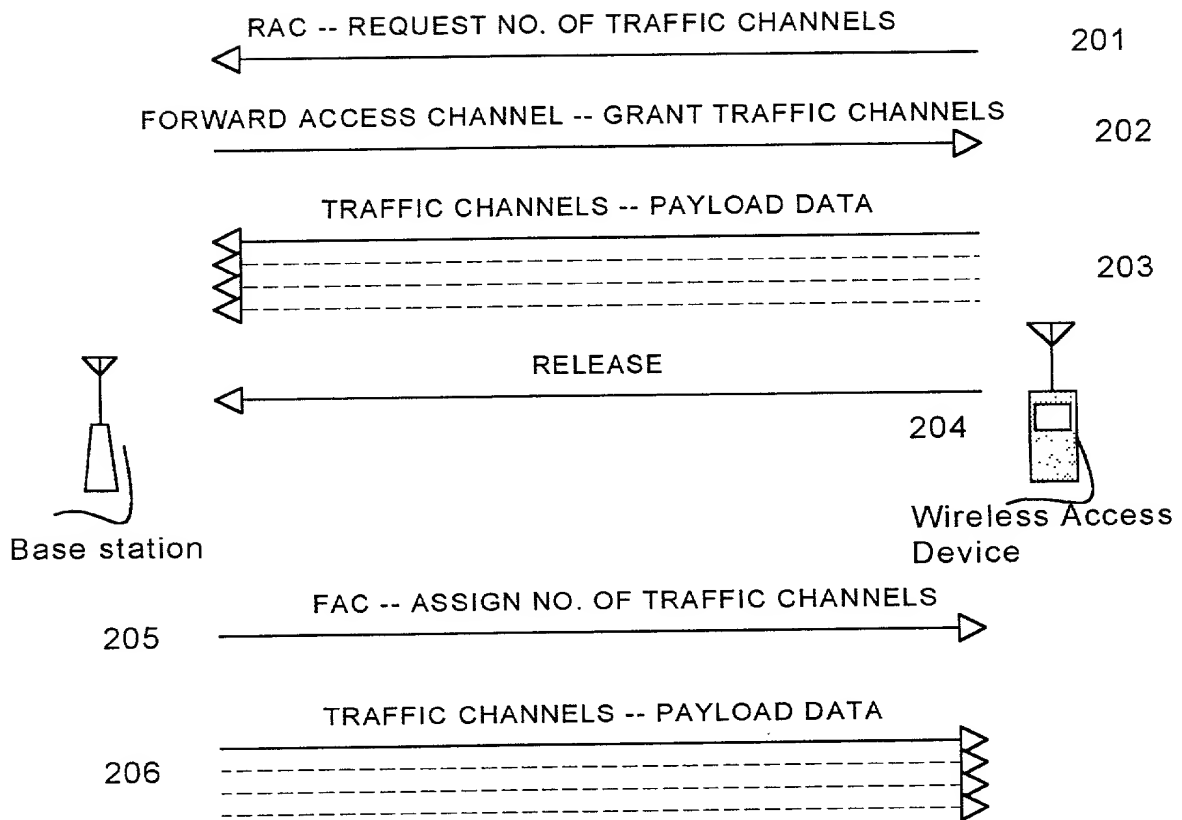


FIGURE 2

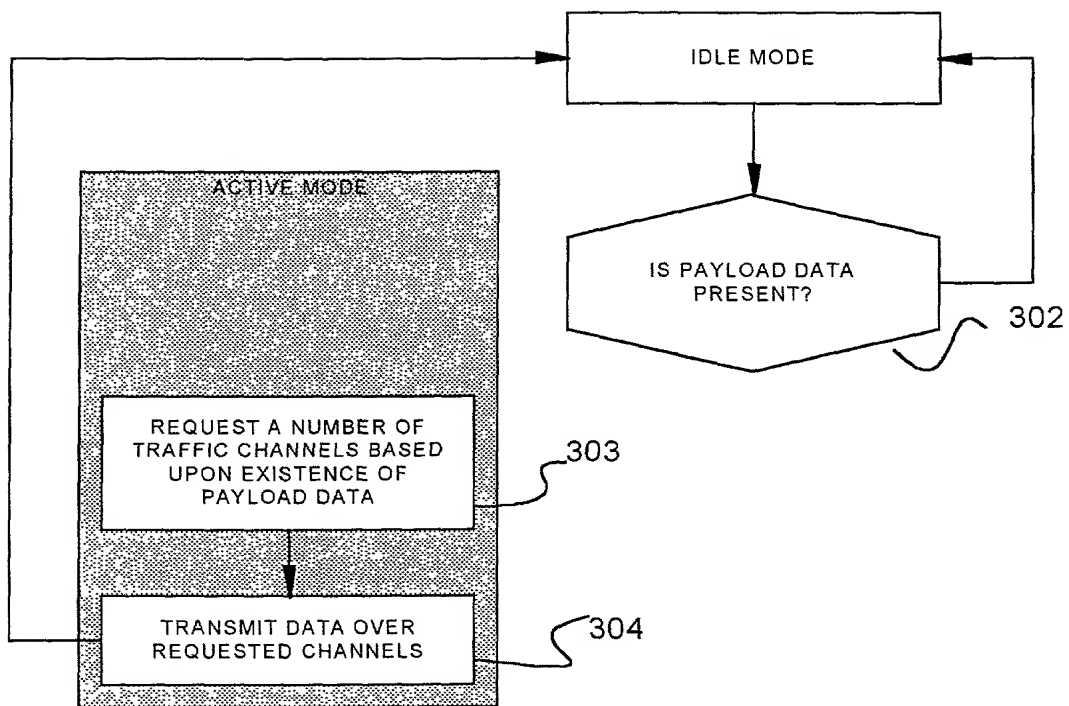


FIGURE 3

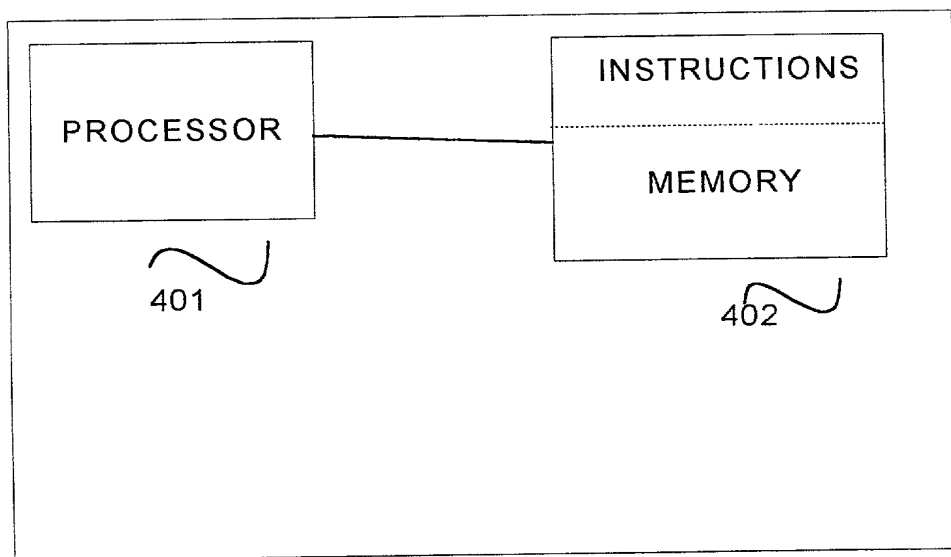


FIGURE 4